

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your product, is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids can damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 10-year guarantee covers any defect in manufacture.

CONTACT DETAILS

If you require further assistance please contact Heritage Sales and Technical Enquiries:

Sales: 0844 701 8501

Technical: 0844 701 8503

Email: technical@heritagebathrooms.com

Website: www.heritagebathrooms.com

Heritage Bathrooms
Unit 6 Albert Road
St Philips Central
Bristol
BS2 0XJ



© Heritage Bathrooms 2010

HERITAGE[®]
BATHROOMS

Kharine Cistern Fittings PKW01

Fitting Instructions & Contents List

Before starting any installation project please consider:

Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use



Please keep these instructions for future reference and request of replacement part




Installation Instruction

A207 Fill Valve + B208 Dual Flush Valve + C202 Dual Push Button

Important: Before installation, please remove the old fittings & clean the tank. Please clean the water supply pipe first for newly installed one. Do not use chlorine (bleach) cleaners or related products.

Fixing Clip

Unlock the fixing C to adjust the Overflow Pipe to desired height, then lock the Fixing Clip.

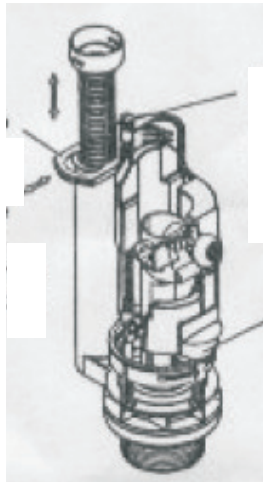

Adjust the height of the float by turning the Half Flush Adjusting Bolt. The higher the Float is, the less water Flush

Contact Details

If you require further assistance please contact Heritage Sales & Technical Enquiries.

Sales: 0844 701 8501


Technical: 0844 701 8503

Email: technical@heritagebathrooms.com

Website: www.heritagebathrooms.com

Heritage Bathrooms

Unit 6 Albert Rd
St Philips Central
Bristol
BS2 0XJ

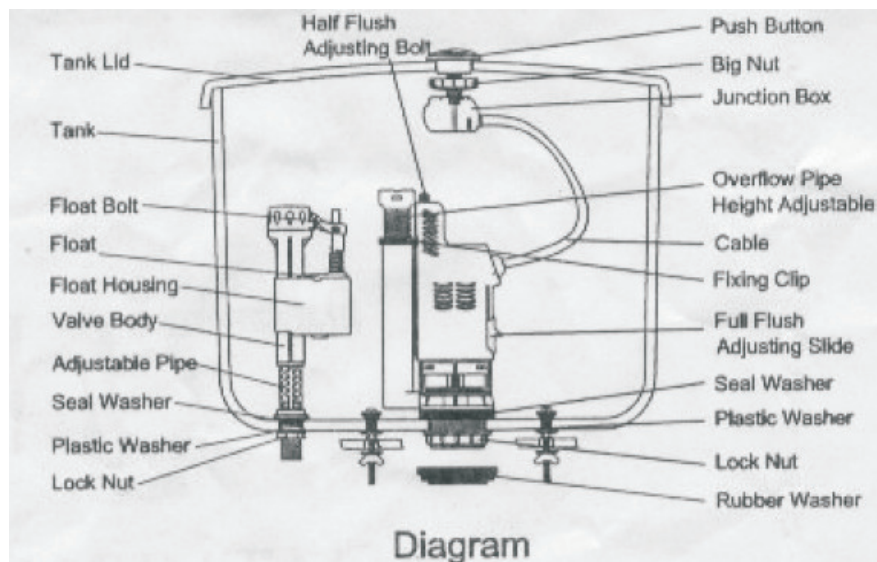





© Heritage Bathrooms 2010




1. A207 Fill Valve



Disassemble the Lock Nut for the Valve Installation.

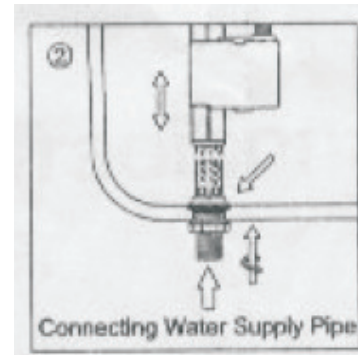


Position Valve inside tank. Push down on the Valve Shank (**Not the Top**) while tightening the lock nut. Screw the Valve Shank clockwise, and pull the Valve Body to an expected height.

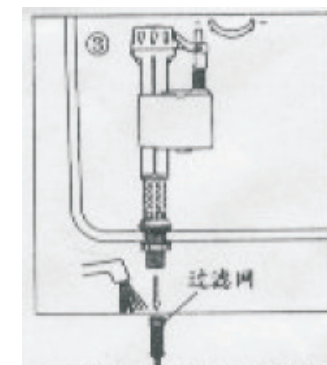


Adjust water level by screwing Float Bolt & move the Float Housing up or down along the Valve Body to join with the Float. Pay attention to the Float Housing this should be attached to the Float and the Arm **Is Not Raised**. Take out of the Filter & clean it often.

2. B208 Dual Flush Valve

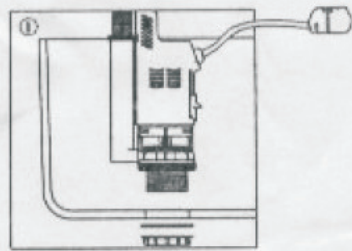


Disassemble Lock Nut, plastic washer for VALVE installation. Position the VALVE inside tank, push down on the valve body while attaching Plastic Washer & tightening Lock Nut.


3.C202 Dual Push Button

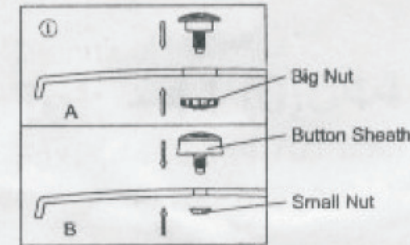


Turn the Nut & loosen it. Install the button on the tank lid & fix the Nut properly. Installation A for $\varnothing 4\text{cm}$ hole in the Tank lid. Installation B for $\varnothing 2\text{-}\varnothing 3\text{cm}$ hole in the Tank lid.

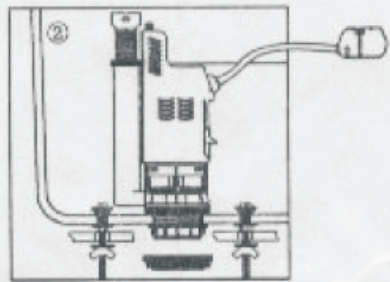


Nest the Tank to Bowl Washer in the Lock Nut & position the TANK on the Toilet Bowl properly. Disassemble the Tank to Bowl Bolts. Fix the Tank to Toilet Bowl with the Tank to bowl bolts tightly.

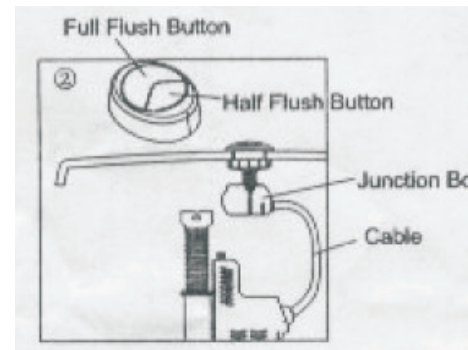

Make Cable smooth, install the button on the junction box, & then close the Tank lid, fill the tank with water & push the full & half button to check whether the flushing is normal or not.

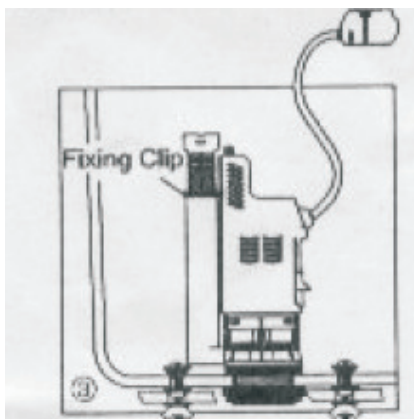

Unlock the fixing clip to adjust the Overflow Pipe to desired height,

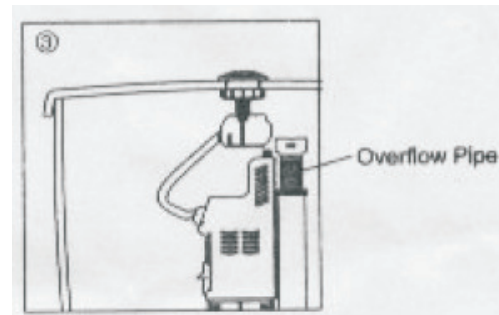

Fix the clip on the overflow pipe installation for front push & side push is the same as top flush.

Note: subject to the product If any difference