


Pressure Reducing Valve with gauge

Features

- Controls static and dynamic pressure
- Conforms to BS EN 1567
- Easy to service high temperature cartridge
- AISI 304 stainless steel cartridge filter
- Supplied with a pressure gauge
- WRAS Approved
- 1/2" & 3/4" BSP Parallel Female Ends

Cavitation Chart

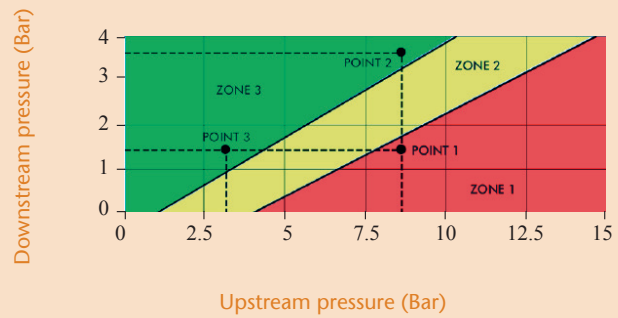

	1/2"	3/4"
A		
B	75	78
C	76	77
D	18	16
E	46	46

No.	Part Name	Materials
1	Body	Cw602N
2	O-Ring	EPDM + Perox
3	Plug	PA66 + 30% f.d.v.
4	Cartridge	PA66+30%F.V. + colouring MACROVERS 564FA.
5	Spring	EN 0270-3-1.4310
6	Bonnet	PA66+30% f.d.v.
7	Adjustable Plug	Cw614N
8	Plastic Cap	PC / ABS
9	Pressure gauge	

Technical Data

Max inlet pressure (static)	16 Bar
Adjustable pressure range	0.5 - 6 Bar
Min inlet pressure	0.5 Bar
Max inlet temperature	80°C
Factory set pressure	3 Bar

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.