

# TECHNICAL DATA SHEET

## ARTISAN

### Thermostatic Recessed Dual Control Shower Valve with Adjustable Riser Kit


#### Product Specification

**Product Code:** AR3 SHCMT C  
**Finish:** Chrome  
**Product Type:** Contemporary  
**Construction:** Body is of brass construction  
**Supply:** Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.  
**Inlet Connections:** 15mm Compression connections  
**Working Pressures:** Min 0.2 Bar, Max 5.0 Bar



#### Additional Information

- Chrome plated to BS EN 248
- Supplied with wall outlet, adjustable riser kit, large single function handset and soap dish
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rates at 0.2 Bar (open outlet without flow regulators) 8.0 l/min
- Fully serviceable from the front

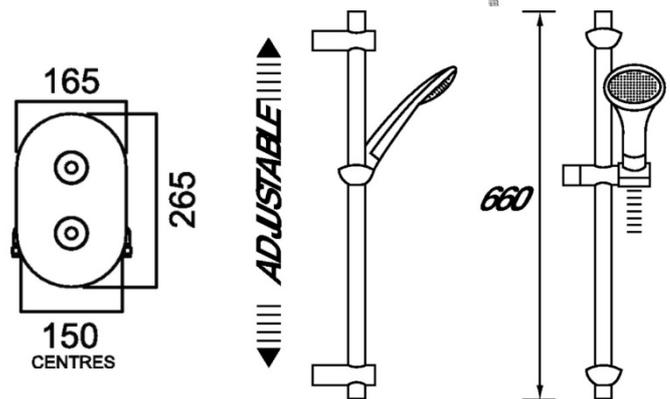


#### Flow Rates (litres per minute)

System Pressure (bar)	0.1	0.2	0.5	1.0	2.0	3.0	5.0
Outlet 1	4.55	6.3	9.96	14.09	19.92	24.4	31.5

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

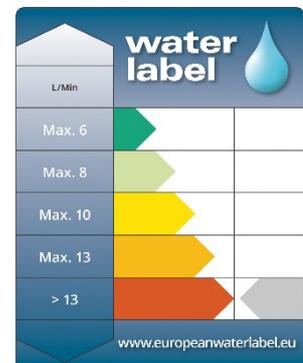

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
 Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.