


SIAMP

Monaco

GB

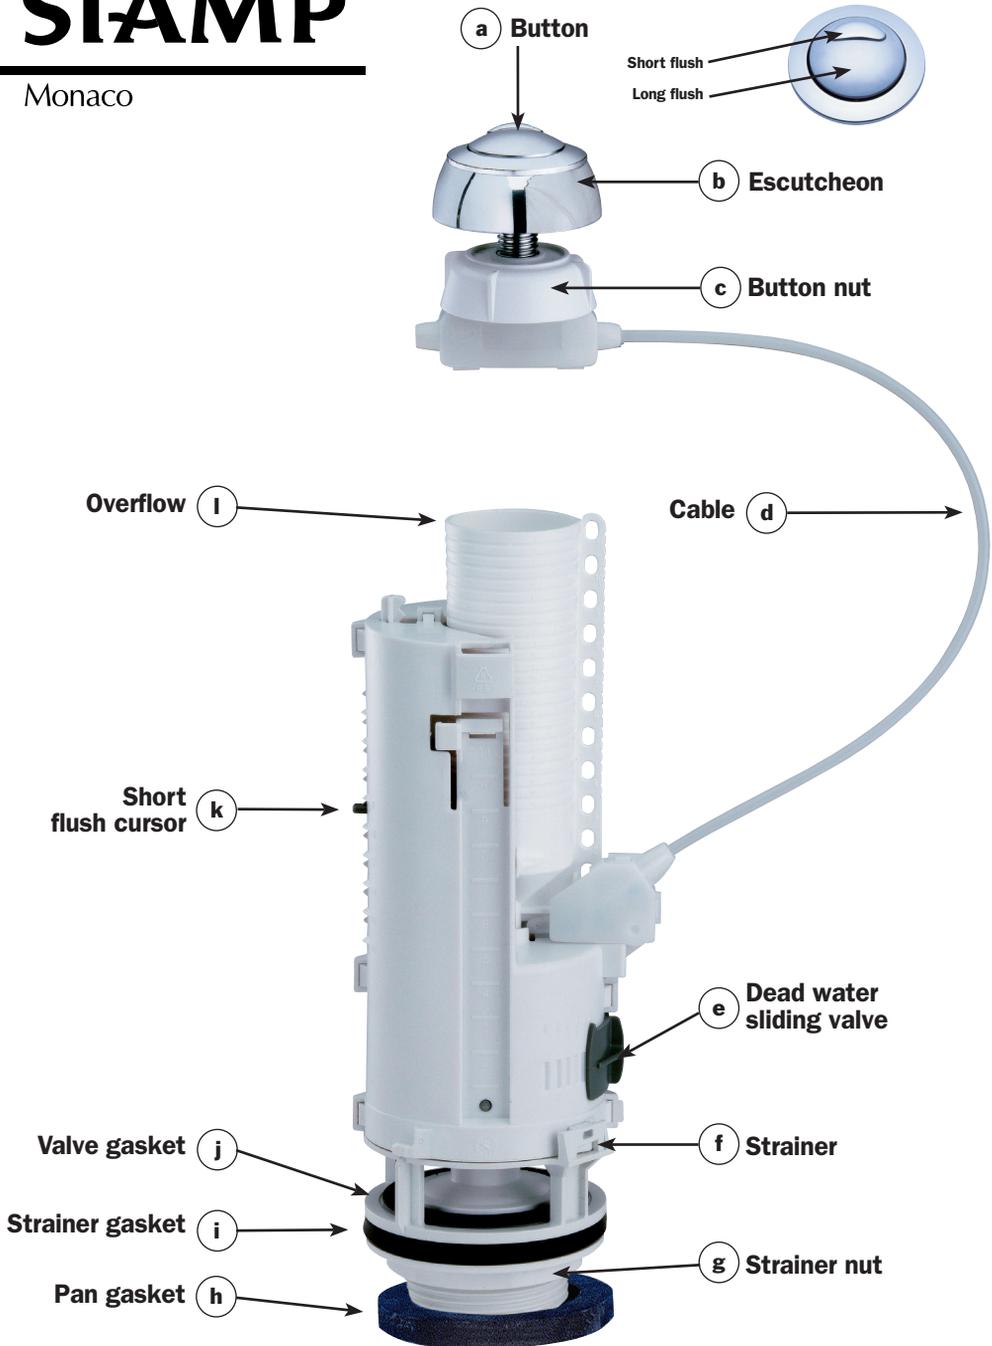


OPTIMA 50

I - INSTALLATION


Position the mechanism in the cistern and secure it in place with the nut (g)

Manually screw the flush valve nut (g) until it is in contact with the ceramic. If necessary give an extra quarter turn (maximum) with the appropriate spanner.



NB : Excessive tightening can damage the mechanism and would not be covered by the guarantee.

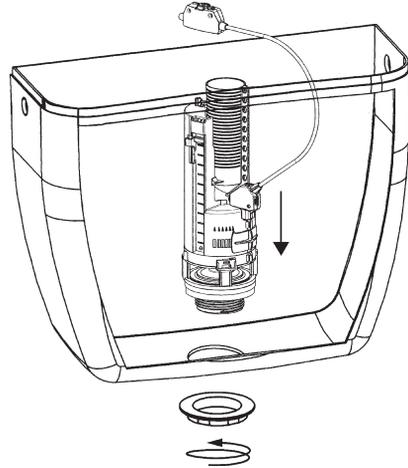

II - ASSEMBLING BOWL AND CISTERN

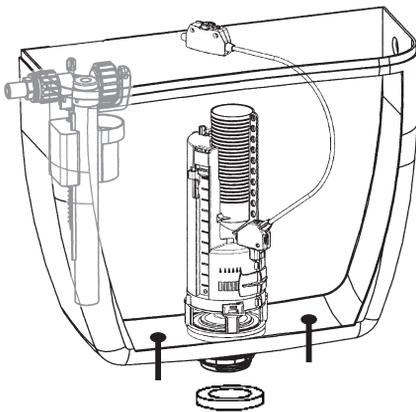


- 1 Fix screws at the bottom of the cistern (see order of parts below)
- 2 Position the latex foam gasket on the nut (g)
- 3 Position the cistern on the bowl and secure it with wing nuts

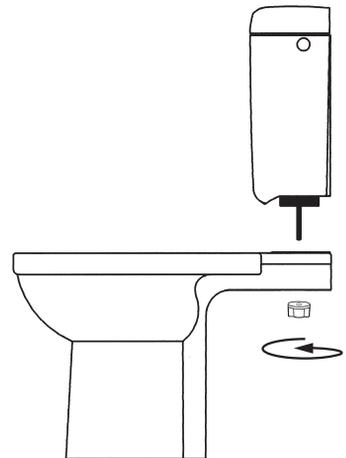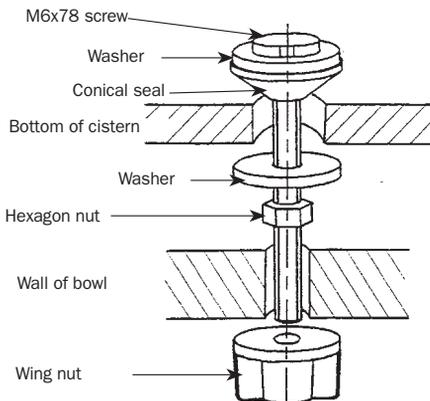


III - INSTALLATION OF BUTTON

- 1 Once the set-up has been completed, place button (a) on lid and screw button nut (c), (if the hole in the lid (D) is > 38 mm and < 45 mm, remove the escutcheon (b))
- 2 Clip cable case
- 3 Place lid back on top of cistern

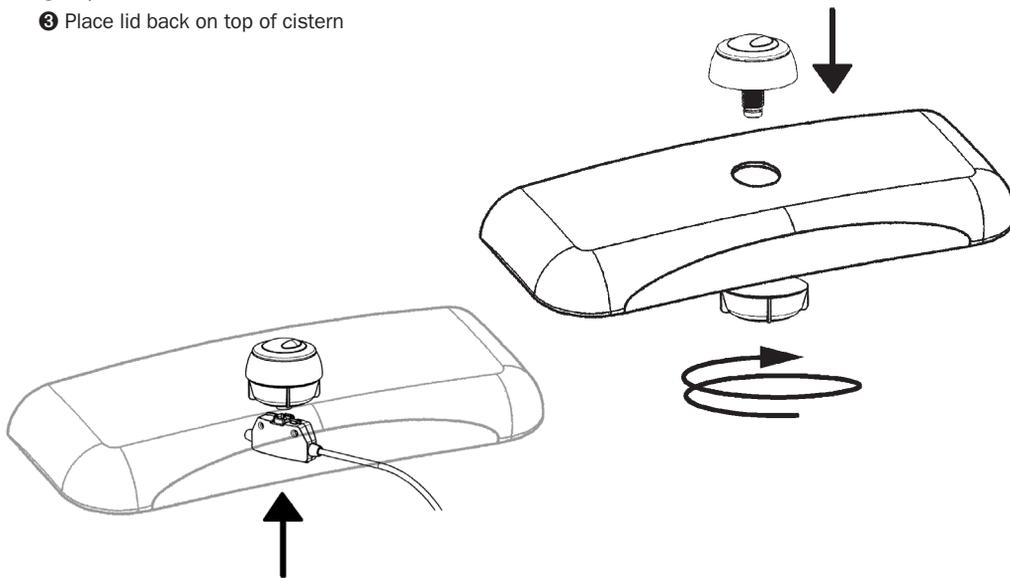

IV - MAINTENANCE

Changing the valve gasket

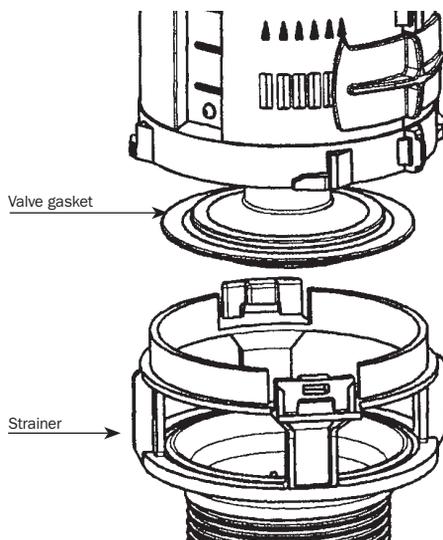


- 1 After having opened the cistern, turn the mechanism 90° to separate it from its strainer
- 2 Change the valve gasket
- 3 Reposition the mechanism, locking it into the strainer
- 4 Close the cistern again.

INSTALLING THE FLOAT VALVE

ROBECO 06 and STANDARD 15EL


- ① Position valve
- ② Fasten with nut
- ③ Connect to water supply
- ④ Adjust water level with the adjustment screw (15 EL) or by bending the rod (06)

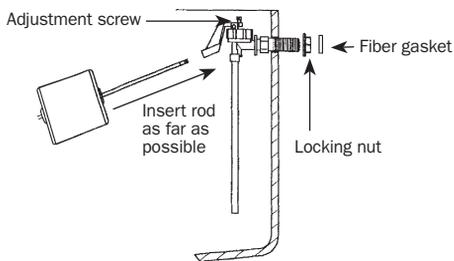

Manually screw the backnut until it is in contact with the ceramic. If necessary give an extra quarter turn (maximum). N.B.: Excessive tightening can damage the mechanism and would not be covered by the guarantee. Ensure tightness of connection to cistern with filter gasket.

COMPACT 95L

- ① Position valve
- ② Fasten with nut
- ③ Connect to water supply
- ④ Adjust water level with the adjustment screw

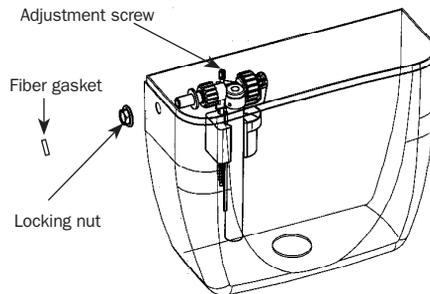


WARNINGS:


- 1 - Do not overtight in any case.
- 2 - Do not use any sealing paste and/or compound in any case
- 3 - Do not use connector handling the internal part of the inlet valve.

SIAMP will be not responsible in case these warnings are not respected.

COMPACT 99B and HANDY 93B

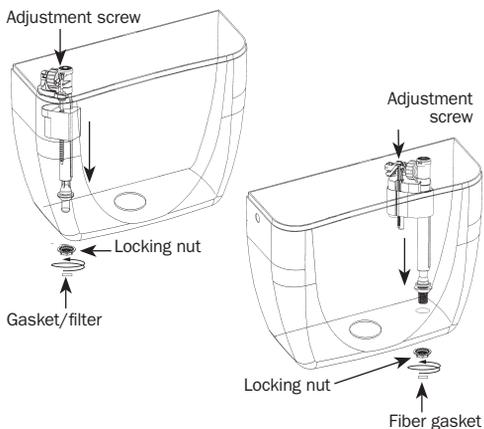

MAINTENANCE (95L & 99B)

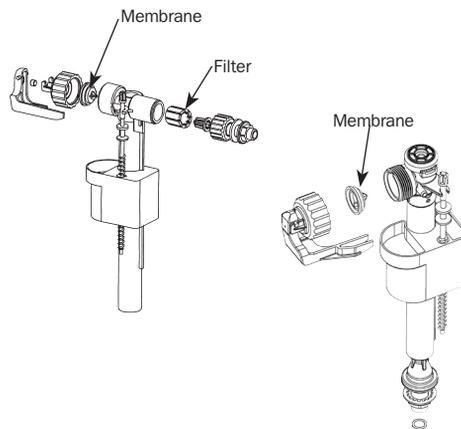

SIAMP
Monaco

4, quai Antoine 1^{er} - BP 219 - MC 98007 MONACO Cedex
Tél. 00 377 93 15 53 75 - Fax : 00 377 92 05 71 04 - E-mail: contact@siamp.com

SIAMP Ltd - Siamp House Unit 2 / 7 Monsall Road / Newton
Heath / Manchester / M40 8FY