

# AR2 SHXVOFF C

## ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve & Fast Fit Connections



Specification	
Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	None
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	80
Working Pressure Range: (bar)	Min 0.1 Bar, Max 5.0 Bar
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All
Flow Type:	Dual Flow
Flow Rate (Open Outlet)	21.7
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2 "
Isolation Valve Included:	No
Check Valve Included:	Yes

### Features


- TMV2 thermostatic control for a higher level of performance and protection
- Eco feature on flow control (can be over-ridden)
- Supplied with our wallmount 10 fixing kit for easier retro installation

### Product Certifications:

WRAS Certificate No: 1505023  
WRAS Expiry Date: 31/05/2020



TMV2 Certificate No: BC1638-1115  
TMV2 Designation: HP-S & LP-S  
TMV2 Expiry Date: 12/11/2020

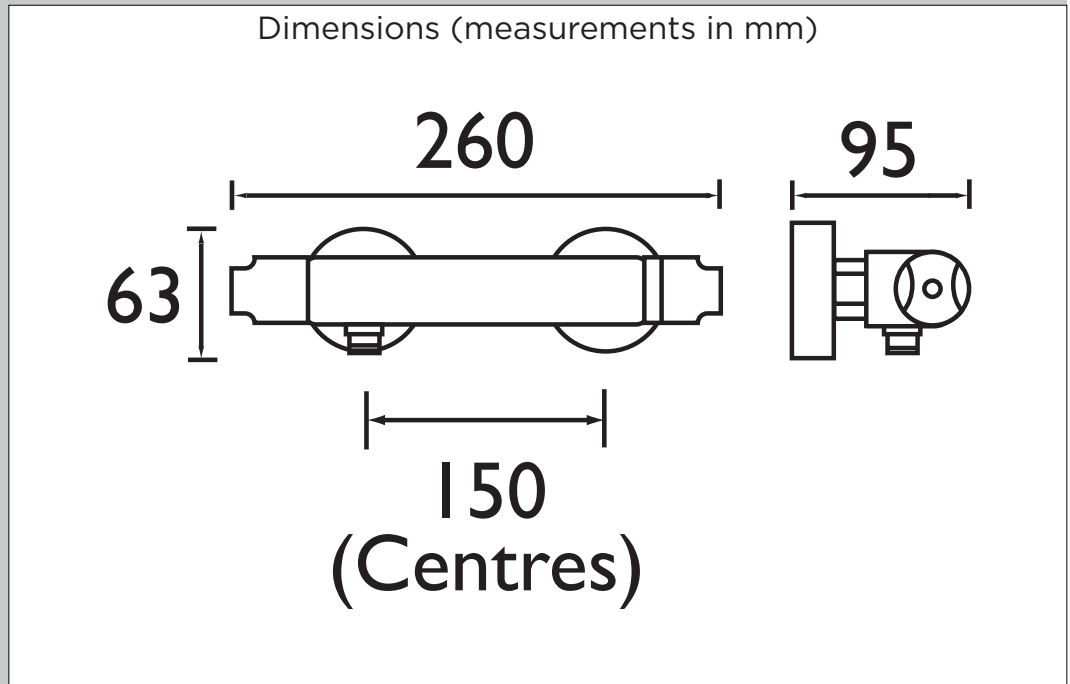

Also available from the ARTISAN Shower Range is:



Flow Rates (l/min)						
System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (with Flow Regulators)	3.6	5.5	8.3	11.7	14	14
Open Outlet with Flow Regulators	3.6	5.7	10	12	14	14
Open Outlet without Flow Regulators	6.6	10.8	15.4	17.7	21.7	34.3

TECHNICAL  
DATA  
SHEET

**BRISTAN**  
TAPS & SHOWERS

D4